




THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SEBSON AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SEBSON

RoHS Compliant

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/12/21	

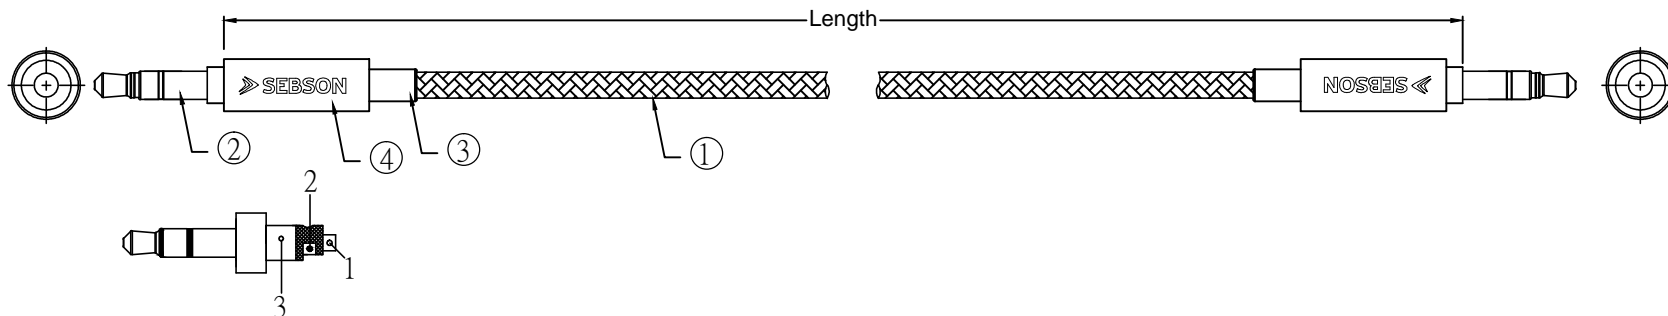

PIN ASSIGNMENT

P1	WIRE TYPE	P2
PIN1		PIN1
PIN2		PIN2
PIN3		PIN3

Remark:

- 1.100% Open/Short Test
- 2.Conductive Resistance:2ohms MAX
- 3.Insulation Resistance:10M ohm MIN.
- 4.The product is Reach/RoHS compliant.

- A)Conductor 8/0.08 Varnished wire + Silk wire (250D)
- B)Jacket Black PVC
- C) Black Cotton Sleeve



ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑤	Cable tie	Cable tie, Black	
④	Shell	Al Shell,Black, "SEBSON" logo	2PCS
③	External Mold	Outer Mould PVC, Black	2PCS
②	Connector	3.5 Stereo Male, Gold-Plated	2PCS
①	Cable	(8/0.08mm Varnished + Silk wire)x3C+ PVC Black + Black Cotton Sleeve	

TOLERANCES UNLESS OTHERWISE STATED
. = ± 1
.X = ± 0.2
.XX = ± 0.1

SEBSON address: Gernotstrasse 17
44319 Dortmund Germany

ERP NO.:		SAMPLE DWG NO:	
SKU:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	3.5mm Stereo Male to Stereo Male	PAGE NO	1/1
		DATE	2018/12/21
APPROVAL		CHECKED	
		DRAWN	