



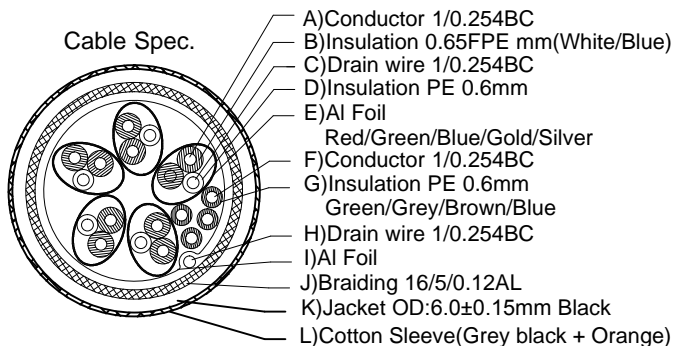

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SEBSON AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SEBSON


RoHS CompliantU

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/12/21	

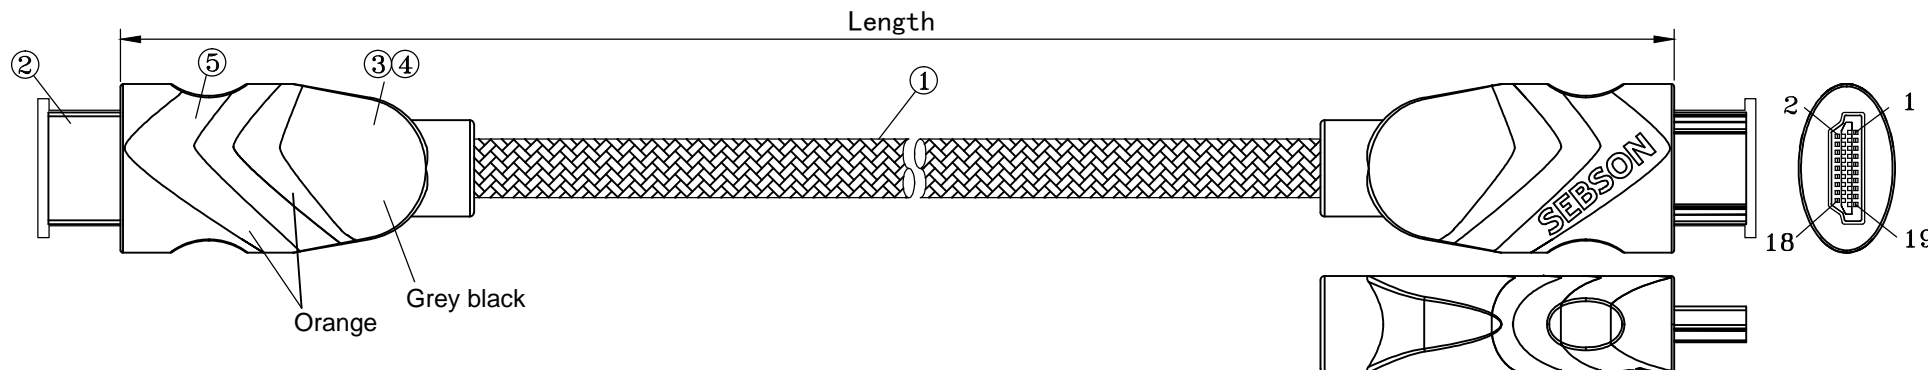


- Cable Spec.
- A) Conductor 1/0.254BC
  - B) Insulation 0.65FPE mm(White/Blue)
  - C) Drain wire 1/0.254BC
  - D) Insulation PE 0.6mm
  - E) Al Foil
  - Red/Green/Blue/Gold/Silver
  - F) Conductor 1/0.254BC
  - G) Insulation PE 0.6mm
  - Green/Grey/Brown/Blue
  - H) Drain wire 1/0.254BC
  - I) Al Foil
  - J) Braiding 16/5/0.12AL
  - K) Jacket OD:6.0±0.15mm Black
  - L) Cotton Sleeve(Grey black + Orange)

Signal Assignment

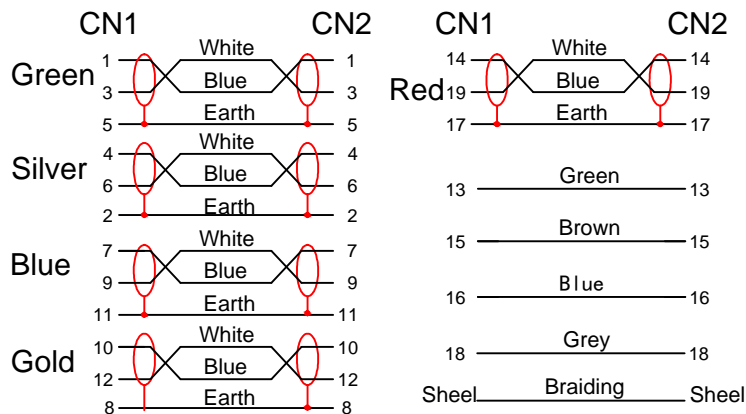

- Remark:
- 1.100% Open/Short Test
  - 2.Conductive Resistance:5ohms MAX
  - 3.Insulation Resistance:10M ohm MIN.
  - 4.HI-POT:DC 300V/10MS.
  - 5.The product is Reach/RoHS 2.0 compliant.
  - 6.Support 4K\*2K@60Hz HDCP2.2 test.

⑥		HDMI Protective Cap, PE	2PCS	
⑤	External Mold II	Outer Mould 45P PVC, Orange	2PCS	
④	External Mold I	Outer Mould 35P PVC, Grey black	2PCS	
③	Inernal Mold	Inner Mould PE	2PCS	
②	Connector	HDMI A Male, Gold-Plated	2PCS	
①	Cable	30AWG 1.4V (19+1BC) 80ALB HDMI Cable OD:6.0mm [(0.254BC+FPE)*1P+D+AL1*5C + (0.254BC+HDPE)*4C + AL + D + 80ALB + PVCOD6.0mm + Cotton Sleeve(Grey black + Orange)		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK



**SEBSON address: Gernotstrasse 17  
44319 Dortmund Germany**

ERP NO.:		SAMPLE DWG NO.:	
SKU:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	HDMI 2.0b AM-AM Cable	PAGE NO	1/1
		DATE	2018/12/21
APPROVAL	CHECKED	DRAWN	