






THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF SEBSON AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF SEBSON


RoHS Compliant

REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2018/12/21	


Length

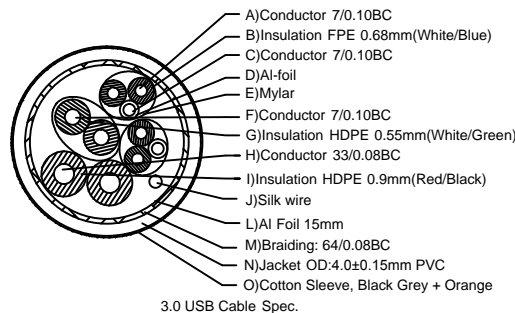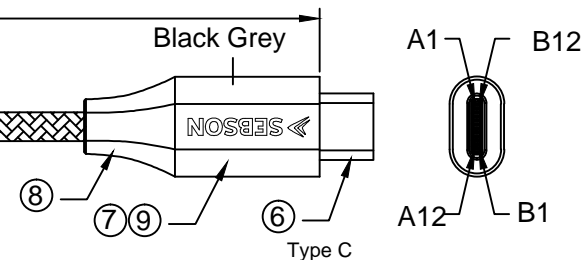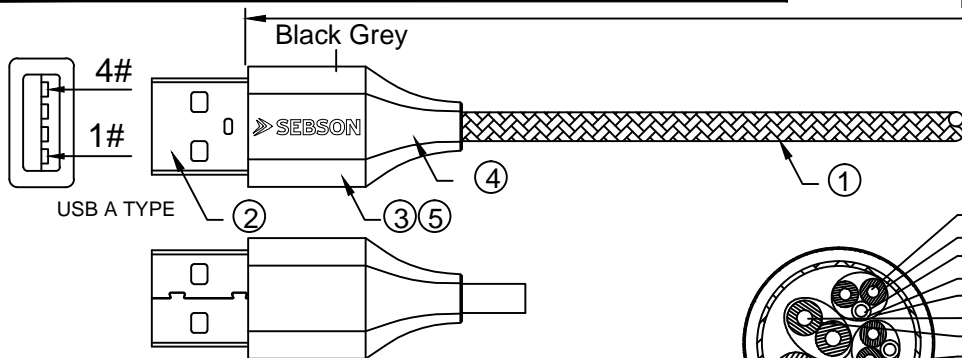

Type C Male




CONNECTION

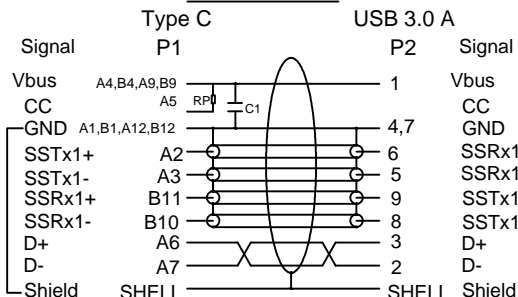

- Remark:
- 100% Open/Short Test
  - Conductive Resistance: 2ohms MAX
  - Insulation Resistance: 5M ohm MIN.
  - The product is Reach/RoHS compliant.

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑩	Cable tie	Cable tie, Black	
⑨	Shell	Al Shell, Black, "SEBSON" logo	1PC
⑧	External Mold	Outer Mould 25P PVC, Black Grey	1PC
⑦	Innernal Mold	Inner Mould, PE	1PC
⑥	Connector	USB 3.0 Type C Male, Nickle-Plated, 56K, Shielding Sell	1PC
⑤	Shell	Al Shell, Black, "SEBSON" logo	1PC
④	External Mold	Outer Mould 25P PVC, Black Grey	1PC
③	Innernal Mold	Inner Mould, PE	1PC
②	Connector	USB 3.0 A Male, Nickle-Plated	1PC
①	Cable	USB3.0 Cable [(7/0.10BC+0.68FPE)*1P+D (7/0.10BC) +AL+ML]*2C+ (7/0.10BC+0.55HDPE)*1P + (33/0.08BC +HDPE)*2C (Red/Black) +AL +64/0.08BC+OD4.0PVC +Cotton Sleeve(Black grey + Orange)	



		<b>SEBSON address: Gernotstrasse 17 44319 Dortmund Germany</b>	
ERP NO.:		SAMPLE DWG NO.:	
SKU:		REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	USB 3.0 Type C to USB 3.0A	PAGE NO	1/1
		DATE	2018/12/21
APPROVAL		CHECKED	
		DRAWN	